

SAYERLACK SOLUTIONS FOR THE TEMPORARY PROTECTION OF SURFACES

WATER-BASED PEELABLE COATINGS



VERSATILITY OF USE

EASE OF APPLICATION

ADEQUATE ADHESION

EASY PEEL OFF

SAYERLACK SOLUTIONS FOR THE TEMPORARY PROTECTION OF SURFACES


WATER-BASED PEELABLE COATINGS

Water-based peelable coatings are temporary protective films designed to create a layer that, once dried, can be easily removed in a single peel without damaging the underlying surface.

They are the ideal solution when an effective temporary protection is required -quick to apply and equally quick to remove - especially in production environments where speed, cleanliness, and overall finishing quality are essential.

AXV2350/00 is designed to be applied on finished surfaces, both glossy and matte, such as melamine paper and coated wood. It forms a uniform film that protects the surface during the various industrial processing stages, particularly in coating operations where overspray may occur or where damage such as scratches, dirt, or fingerprints can result from handling and transportation.

TECHNICAL FEATURES	
SEGMENT OF USE	Flat parts, cabinet doors, panels
APPLICATION	Automatic roller
QUANTITY TO APPLAY	75-100 gr/m²
CATALYSIS AND DILUTION	Ready to use
DRYING	Staking 20°C 2-3h 60°C 5 min
SUPPORT	Melamine paper or coated surfaces
PEEL OFF	Easy

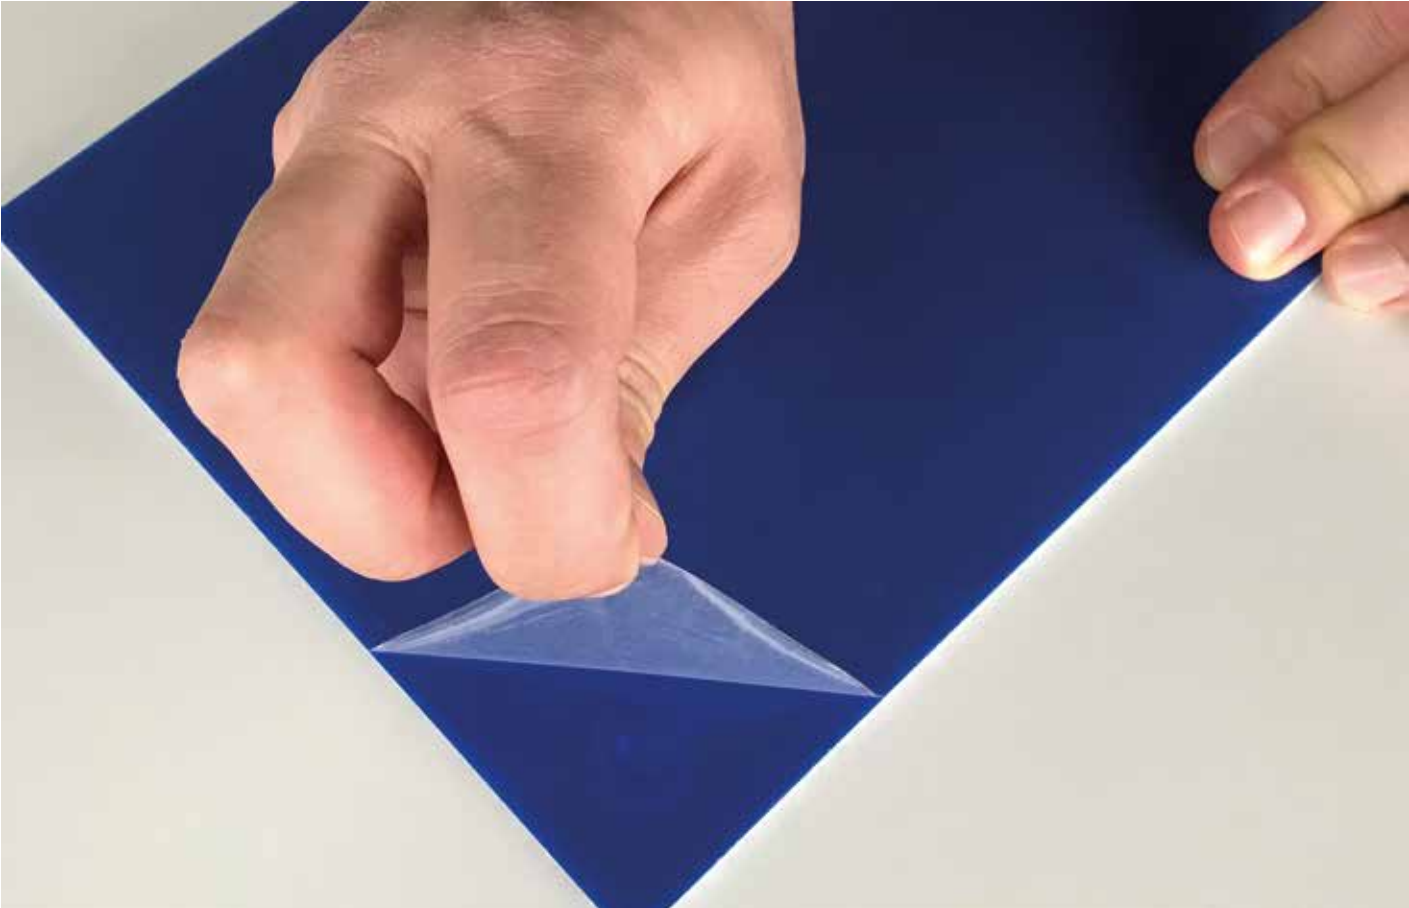

SAYERLACK SOLUTIONS FOR THE TEMPORARY PROTECTION OF SURFACES

WATER-BASED PEELABLE COATINGS

AXL3892/00 is formulated with specially modified resins to obtain a uniform and resistant film. Designed to be highly versatile in use, it can be applied on various coated surfaces, including complex manufactured items, and can be easily removed once the usage cycle is completed.

After drying, the film develops high solvent resistance, good hardness, and excellent elasticity, features that ensure effective protection even under more demanding operating conditions.

Furthermore, compared to common peelable coatings available on the market, AXL3892/00 offers greater water resistance, making it particularly suitable for surfaces exposed to non ideal conditions, such as humid environments or exterior areas that are not fully sheltered.

TECHNICAL FEATURES	
SEGMENT OF USE	Complex artifacts, cabinet doors,coating equipments
APPLICATION	Spray, manual roller, brush
QUANTITY TO APPLY	100-150 gr/m²
CATALYSIS AND DILUTION	Ready to use
DRYING	Staking 20°C 3-4h
SUPPORT	Melamine paper or coated surfaces, coating equipments
PEEL OFF	Easy

