



SOLVENT BASED ACRYLIC BASECOAT FOR EXTERIOR USE


ADHESION TO
DIFFICULT SUBSTRATES

ISOLATING PROPERTIES
FOR DIFFICULT TIMBERS

WATER BARRIER

TUV2335/XX



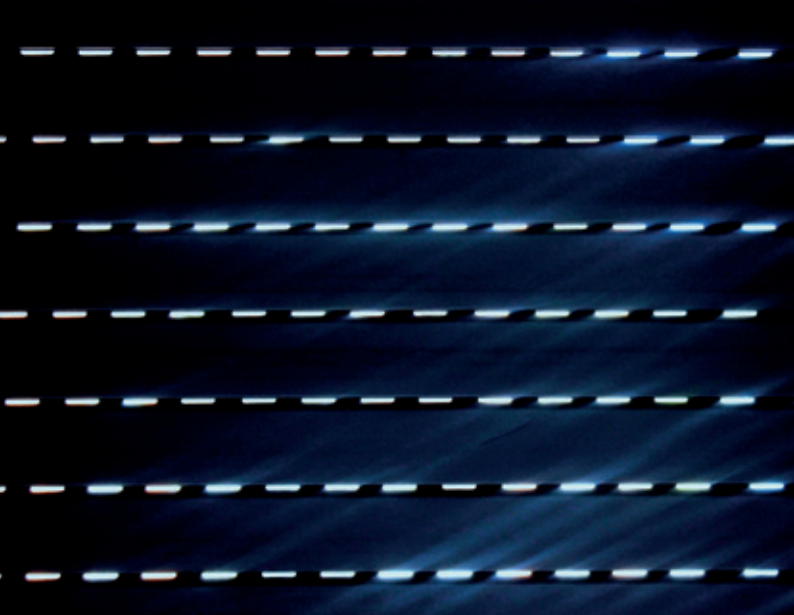

SB ACRYLIC BASECOAT FOR EXTERIOR USE TUV2335/XX

Sayerlack introduces the solvent based acrylic basecoat for exterior use.

TUV2335/XX is the best isolating product for exterior laminated boards and shutters constructed from difficult to coat timbers such as Siberian Larch and other exotic woods.

TUV2335/XX seals pretty much everything into the substrate (tannin, extractives) and presents an effective barrier to water penetration to the sealed surface which is essential to prevent cracking in laminated construction. These properties also make **TUV2335/XX** suitable for the restoration of weathered exterior artefacts blocking underlying surfaces making them ready to finish with a high quality topcoat such as WB 2k topcoat **AZ36**/XX**.

TUV2335/XX can even be used as an adhesion basecoat on exterior PVC.

CHARACTERISTIC	BENEFIT
Adhesion to difficult substrates	Multi-purpose end use product - laminated boards, furniture, shutters, PVC, restoration
Isolating properties for difficult timbers	
Water barrier	Stops cracking in laminated boards

PRODUCT SPECIFICATIONS	
AVAILABLE VERSIONS	/00 clear and /13 standard white
APPLICATION	Air spray, airmix, conventional
DRYING/STACKING	3 hours for typical 100 g/m ² application at 20°C
DILUTION	From 20 to 30% with DT1150/00 as required
HARDENER	20% THV7764/00

Technical Service: Ph. +39 051 770770 - Fax +39 051 770521 customerservice@sayerlack.com

Sherwin-Williams Italy S.r.l. - Export Department
Via del Fiffo 12 - 40065 Pianoro (BO) - Italy
Ph. +39 051 770511 - Fax +39 051 770528
export@sayerlack.it - www.sayerlack.com



Sayerlack is a brand of The Sherwin Williams Company