


## CLEAR HIGH GLOSS FIRE RETARDANT COATING SYSTEM

IN COMPLIANCE WITH BS476 PART 7 CLASS 1





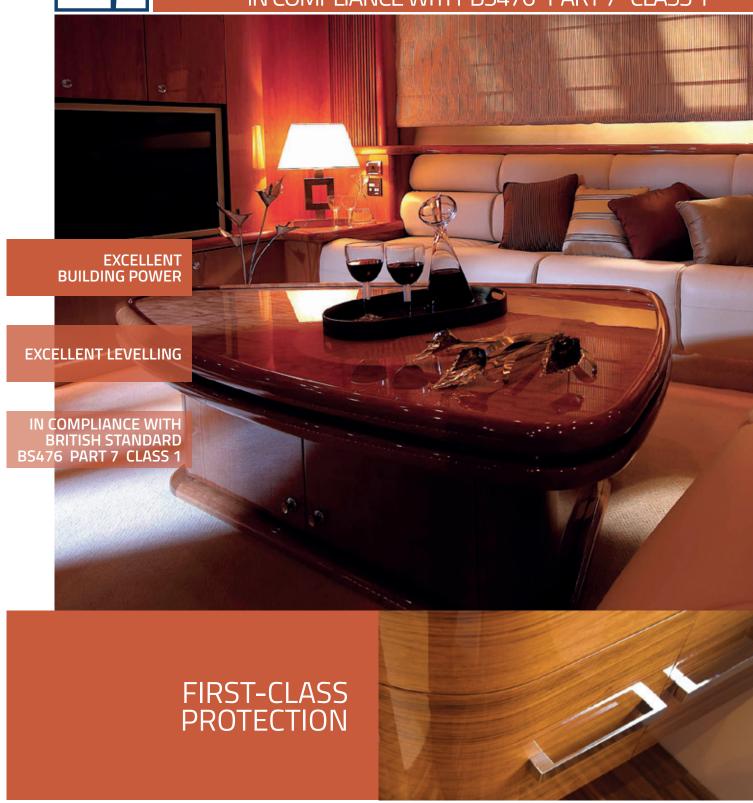

## **CLEAR HIGH GLOSS FIRE RETARDANT COATING SYSTEM**

IN COMPLIANCE WITH BS476 PART 7 CLASS 1

Sayerlack achieves the first-class protection for high gloss and clear design.

|           | COATING SYSTEM                               | g/m²                   | TOTAL<br>g/m² | SUBSTRATE | STANDARD           | CLASS |
|-----------|--|------------------------|---------------|-----------|--------------------|-------|
| TU0565/00 | +50% DT1150/00 + 100% TH0765/00              | 1x100 g/m <sup>2</sup> |               | MDF       | UK BS476<br>part 7 | 1     |
| PU4101/00 | +50% PX4102/00 + 3% PH0777/00 + 3% PH0888/00 | 2x250 g/m²             | 720 g/m²      |           |                    |       |
| TL4100/00 | +100% TH0735/00 + 5% DT0441/00               | 1x120 g/m²             |               |           |                    |       |

A certified fire retardant coating system, tested according to British Standard BS476 part 7, which fulfills the requirements of class 1.

The combination of a polyurethane sealer, a red-ox polyester basecoat and an acrylic topcoat make of this new coating system the proper solution to confer fire retardant properties to flat substrates and furniture, giving an extremely high build and high gloss appearance, maintaining visible the natural vein of the wood.

| Application    | By spray              |  |  |
|----------------|-----------------------|--|--|
| Product market | Flat parts, furniture |  |  |
| Substrate      | Sanded wood           |  |  |
|                | Primer<br>TU0565/00   | Dust free: 10'<br>Touch dry: 3h<br>Sandable: 12h<br>Stackable: 12h         |  |
| Drying time    | Basecoat<br>PU4101/00 | Dust free: 40'<br>Touch dry: 1h<br>Sandable: 24h<br>Stackable: 12h         |  |
|                | Topcoat<br>TL4100/00  | Dust free: 40'<br>Touch dry: 3h<br>Sandable: 3-4 days<br>Stackable: 24-48h |  |

Performance should be certified on particular substrate depending on end use. For more information, please contact your local Sayerlack representative.

Technical Service: Ph. +39 051 770770 - Fax +39 051 770521 customerservice@sayerlack.com

## Sherwin-Williams UK Coatings Ltd.

A1 Business Park, Knottingley, West Yorkshire - WF11 OBU, England Ph. +44 (0) 1977 673363 - Fax +44 (0) 1977 673521 ukinfo@sherwin.com - www.sayerlack.co.uk

## Sherwin-Williams Ireland Ltd.

irlinfo@sherwin.com - www.sayerlack.co.uk

Sherwin-Williams Italy S.r.l. - Export Department Via del Fiffo 12 - 40065 Pianoro (BO) - Italia Ph. +39 051 770511 - Fax +39 051 770528 export@sayerlack.it - www.sayerlack.com

