


FINISHOIL



OIL-BASED
COATINGS

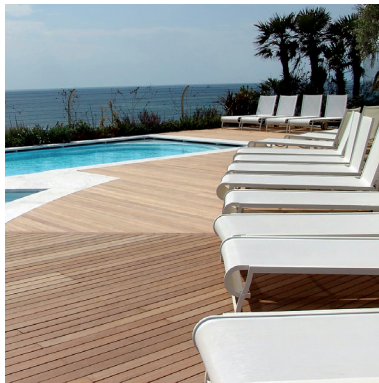

 **SAYERLACK**[®]
INNOVATIVE WOOD SOLUTIONS



FINISHOIL



With their continuous search for solutions for a healthier environment using natural materials, sustainable work processes, renewable energy and non-toxic finishes, Sayerlack is raising awareness that wood can be treated with oil-based products. Treating wood with an oil-based finish is an excellent alternative as it enhances its character and is particularly suitable for people who love natural beauty with all of its flaws, as the finish changes and ages together with the wood. For certain uses, oil-based finishes are often the most appropriate choice. In fact, they behave differently to traditional coatings, as they dry very slowly and do not simply cover the surface but soak deep into the wood's fibres. This mechanism allows the aesthetic features of wood to be preserved and helps it conserve its natural colour. The opportunity to repeat the treatment with the same product whenever necessary also makes an oil-based treatment a versatile and user-friendly solution.



Easy-to-apply systems that naturally strengthen and enliven timber are so often requested for wooden items that Sayerlack has brought together a series of high quality components to create its oil-based FINISHOIL products: a range that can satisfy all the market's main requirements.

OLV 2322/00

The **natural oil OLV 2322/00** is ideal for preserving woods of all types, both solid and veneered. It is absorbed deep into the fibres, reviving the wood, giving it a subtle sheen and enhancing the grain. The product is ready to use and easy to apply using a brush, rag, spray gun or immersion. **OLV 2322/00** is made from 100% natural and bio-compatible substances, **in compliance with Ikea IOS-PRG-0021 specifications**. Items treated with OLV 2322/00 require regular maintenance with the same product. The intervals between these treatments depends on the environmental conditions the finished article is exposed to.

AOV 2343/00

The **waterborne wax-effect oil AOV 2343/00** is designed for treating indoor furniture and parquet flooring. It can be applied using a spray gun, brush or rag and as **AOV 2343/00** is a waterborne oil with a natural fragrance of beeswax it leaves wood looking soft, natural and waxy. As with solvent-based oils, maintenance should be carried out according to the wear the item is subjected to. **AOV 2343/00** can be mixed with 5% of **AH 1564/00** to increase the product's adhesion and chemical resistance while maintaining its long pot-life. We suggest adding the hardener when treating parquet or when a surface that has already been treated needs renovating to achieve maximum performance.

AOV 2343/00 can be coloured using stains and/or pigments from the **AC2110/XX**, **AC0600/XX**, **AC1810/XX**, **XA2006/XX** and **XA4034/XX** series.

OLL 3645/00

The **wax-effect oil OLL 3645/00** can be used for panels, indoor furniture, frames, and skirting boards. It can be applied by spray gun, brush and rag. **OLL 3645/00** is composed by a mix of special oils and selected waxes. It is especially designed for a simple and rapid application, providing good protection to wood, an extremely natural look and a soft waxy finish. Pigmentation is possible with the pastes of series **XEL 3609/XX** and **XE 4150/XX**.

OL 3000/00

The **wood oil OL 3000/00** has been created specifically for the indoor and outdoor parquet sector. The product can be applied using a roller, brush, rag or spray gun, has a high viscosity, good chemical and physical resistance and is quick drying. In the case of outdoor parquet flooring, surfaces should generally be treated once a year. The product can be coloured using the **XEL 3609/XX** and **XE 4150/XX** pastes.

OLL 3667/00

The **creamy oil OLL 3667/00** is designed for the furniture sector. Its properties enable a very easy application by brush or rag. It offers a high level of chemical and physical resistance, quick drying and deep penetration. We recommend the pigmentation using the pastes of series **XEL 3609/XX** and **XE 4150/XX**, which help the oil penetrate and settle in the wood, obtaining optimum pore coloring and enhancing the natural beauty of the wood species that are traditionally treated with oils.

For over sixty years, wood has been Sayerlack's main partner. Together we help to make the home environment safer and healthier by preserving people's well-being.

Sherwin-Williams UK Coatings Ltd.

A1 Business Park - Knottingley
West Yorkshire - WF11 OBU - England
Tel. +44 (0) 1977 673363 - Fax +44 (0) 1977 673521
ukinfo@sherwin.com - www.sayerlack.co.uk

Sherwin-Williams (S) Pte. Ltd.

8 Admiralty Street #07-08, Admirax
757438 - Singapore
Tel. +65 6763 7789 - Fax +65 6763 0252
infoasia@sayerlack.it - www.sayerlack.com

Sherwin-Williams Italy S.r.l. - Export Department

Via del Fiffo 12 - 40065 Pianoro (BO) - Italy
Tel. +39 051 770511 - Fax +39 051 777528
export@sayerlack.it - www.sayerlack.com

Technical Service:

Tel. +39 051 770770 - Fax +39 051 770521
customerservice@sayerlack.com



Sayerlack is a brand of The Sherwin Williams Company