


ACRYLIC HIGH GLOSS SELF HEALING TOPCOAT





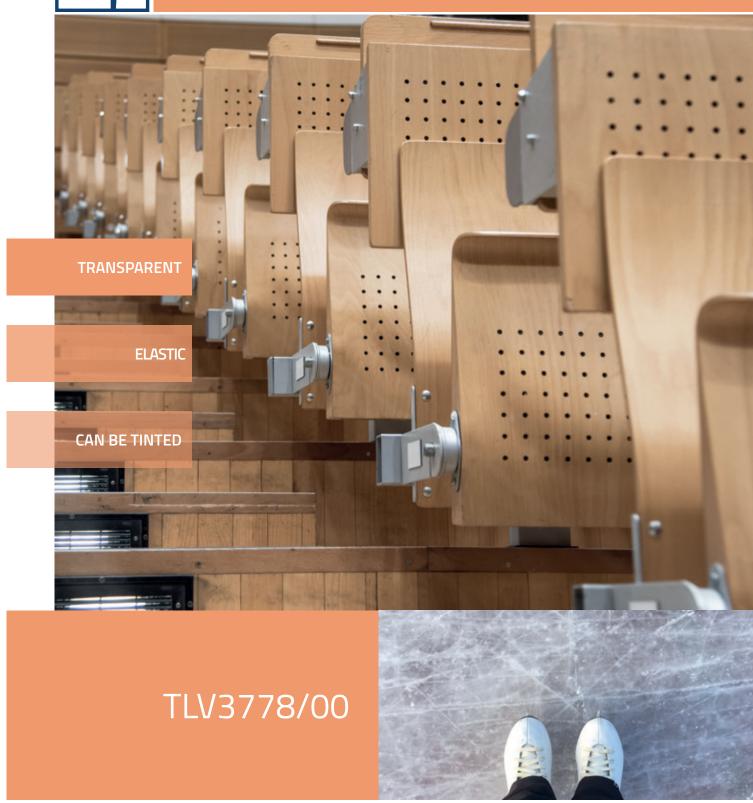

ACRYLIC HIGH GLOSS SELF HEALING TOPCOAT TLV3778/00

TLV3778/00 is an acrylic high gloss topcoat with high build, glossy, and performing like a standard acrylic paint, but with the ability of self heal most part of the damages due to mechanical stress.

NOTE: similarly to any other high gloss acrylic topcoat, the preparation of the substrate is a critical point for the final result in terms of appearance. It is therefore recommended to carefully sand the polyester basecoat prior the application.

The film can self heal most part of scratches caused by pressure and is not effective against cuts.

STRENGHTS	
Transparency	
Build	
Non yellowing	
Levelling	
Self healing	
Can be tinted	

TECHNICAL CHARACTERISTICS			
APPLICATION	Spraying systems, including high pressure		
RAW OR PRETREATED SUBSTRATES	Clean or pigmented basecoats, preferably unsatured polyesters		
DRYING	Dust free	80'	
	Touch free	8 h	
	Brush	4-5 days	
STACKING	48 h		
PREPARATION	50% TH0790/00		
DILUTION	20-40% DT0424/00		
PIGMENTS	Compatible with the pastes of the series TP2009/XX up to 20% w/s; the more pigment is used, the less self healing effect is given		
AREA OF USE	Flat parts, furniture (high end)		

Technical Service: Ph. +39 051 770770 - Fax +39 051 770521 customerservice@sayerlack.com

Sherwin-Williams Italy S.r.I. - Export Department
Via del Fiffo 12 - 40065 Pianoro (B0) - Italia
Ph. +39 051 770511 - Fax +39 051 770528
export@sayerlack.it - www.sayerlack.com

