




DEEP BLACK SCRATCHPROOF PU TOPCOAT

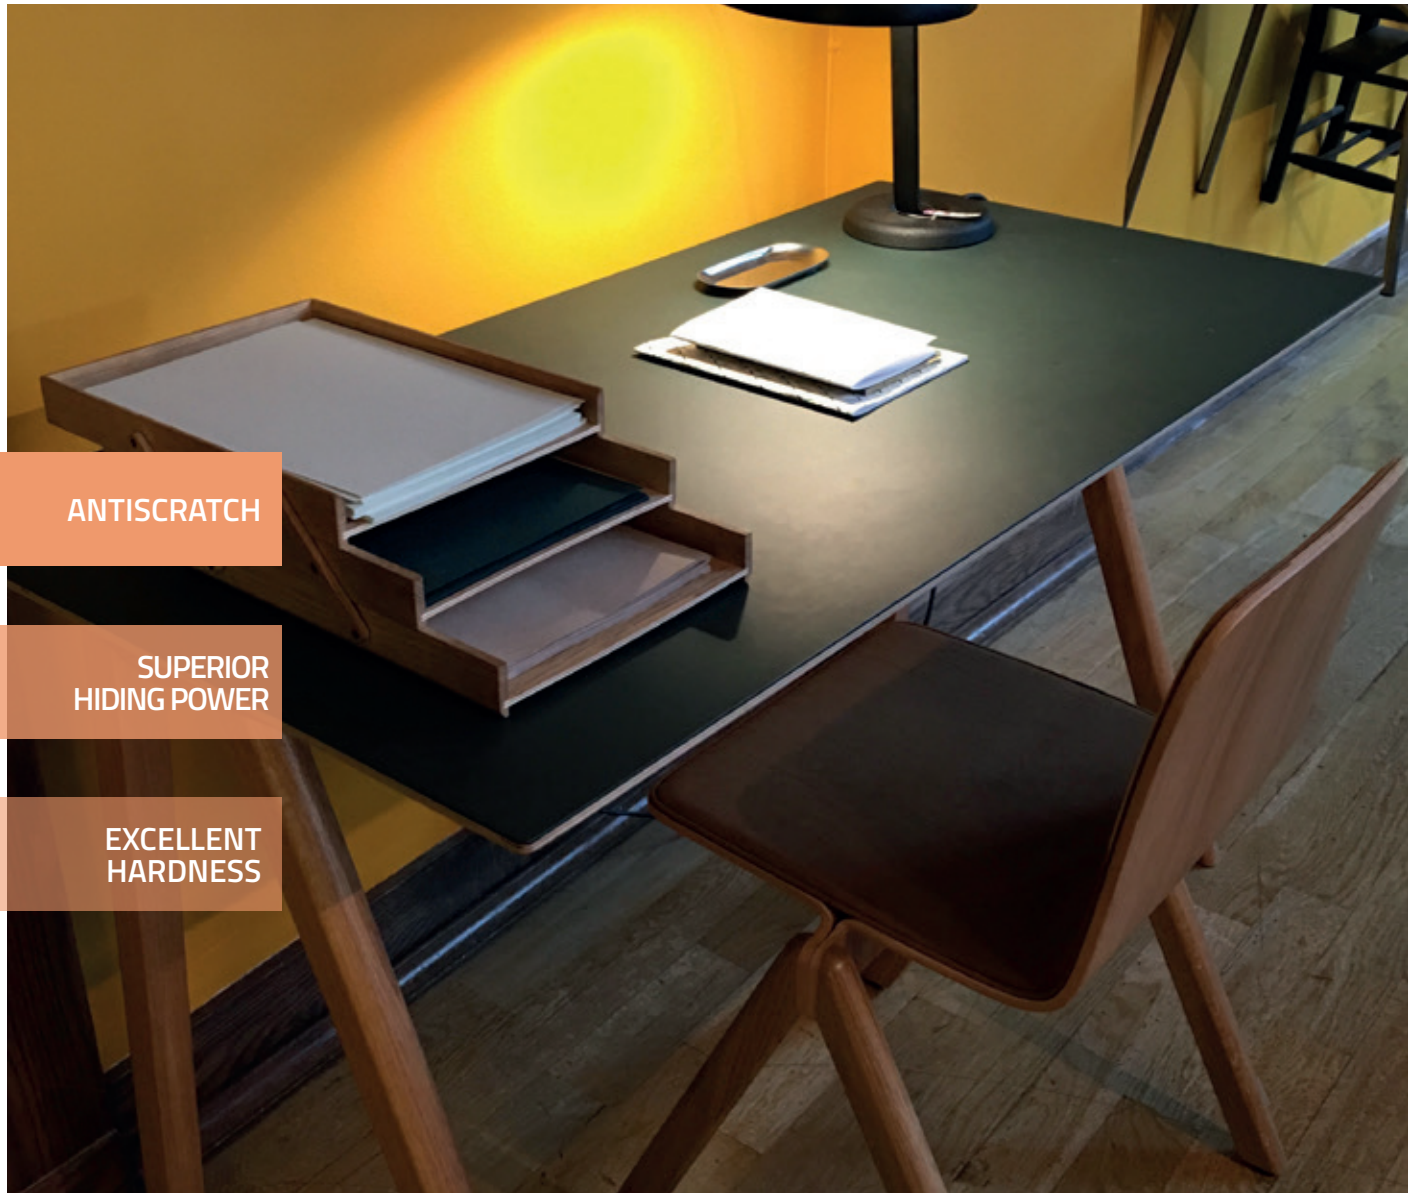

ANTISCRATCH

SUPERIOR
HIDING POWER

EXCELLENT
HARDNESS

TZL3400/22





DEEP BLACK SCRATCHPROOF PU TOPCOAT TZL3400/22

TZL3400/22 is a low gloss black 2k solventborne polyurethane topcoat.

Its main characteristic is the low gloss, 5, combined with an extreme nail polishing resistance. This is the most interesting property in a product, a black low gloss topcoat, that is intrinsically highly sensitive to this visual defect.

Combined with this property there are an excellent leveling and a quick drying. It is dust free in 10 minutes, dry to touch in 2 hours. It has a good hiding power, the substrate is completely hidden with only two coats of 100 g/m².

There is no need to sand between the two coats, provided the second one is applied no longer than one hour after the first one.

It is ready to use, but it can also be thinned with 5% of DT0090/00.

TECHNICAL CHARACTERISTICS

VERSIONS		5 gloss, black color	
AREA OF USE		Frames, profiles, panels	
METHOD OF USE		Fixed guns, airmix, airless	
POT LIFE		2 h	
DRYING TIME (100 g/m ² at 20°C)		Dust free	10'
		Touch dry	20'
		Stackable	8 h
MIXING PROCEDURE		BY WEIGHT (kg)	BY VOLUME (l)
PART A	TZL3400/22	100	100
PART B	TH0759/00	50	50

Technical Service: Ph. +39 051 770770 - Fax +39 051 770521 customerservice@sayerlack.com

Sherwin-Williams Italy S.r.l. - Export Department
Via del Fiffò 12 - 40065 Pianoro (BO) - Italy
Ph. +39 051 770511 - Fax +39 051 770528
export@sayerlack.it - www.sayerlack.com



Sayerlack is a brand of The Sherwin Williams Company