



 **SAYERLACK**[®]
INNOVATIVE WOOD SOLUTIONS

FIRE RETARDANT COATINGS | SYNOPTIC TABLES

Class 1 (Italy)

Coating system name	Chemistry	g/mq	Clear	Standard	Class	Substrate
TA	PU	450	sealer TU 22 (2x150) hard. 50% TH 222 topcoat TZ 22** (1x150) hard. 50% TH 222	IT UNI 9796 (DM6/3/92)	1	MDF
TA-1	PU	390	sealer TU 22 (2x140) hard. 50% TH 222 topcoat TZ 22** (1x110) hard. 50% TH 222	IT UNI 9796 (DM6/3/92)	1	MDF
TE	water	400	multi-coat AF 1105 (2x200) hard. 10% AH 111	IT UNI 9796 (DM6/3/92)	1	MDF
TM (FLOOR)	water	100	multi-coat AF 60**/00 (1x100) hard. 10% AH 1547	IT UNI 9796 (DM6/3/92)	1	MDF
			White			
TB	PU	450	sealer TU 22/13 (2x150) hard. 50% TH 333 topcoat TZ 22**/13 (1x150) hard. 50% TH 333	IT UNI 9796 (DM6/3/92)	1	MDF
TB-1	PU	390	sealer TU 22/13 (2x140) hard. 50% TH 333 topcoat TZ 22**/13 (1x110) hard. 50% TH 333	IT UNI 9796 (DM6/3/92)	1	MDF
TD	water	400	multi-coat AF 22/13 (2x200)	IT UNI 9796 (DM6/3/92)	1	MDF
			Pigmented			
TC-BIANCO (white)	PU	450	sealer TU 22/13 (2x150) hard. 50% TH 333 topcoat TZ 22** (1x150) hard. 50% TH 333 20% max. pigmented pastes TP 2009/XX	IT UNI 9796 (DM6/3/92)	1	MDF
TC-BLU (blue)	PU	450	sealer TU 22/13 (2x150) hard. 50% TH 333 topcoat TZ 22** (1x150) hard. 50% TH 333 20% max. pigmented pastes TP 2009/XX	IT UNI 9796 (DM6/3/92)	1	MDF
TC-GIALLO (yellow)	PU	450	sealer TU 22/13 (2x150) hard. 50% TH 333 topcoat TZ 22** (1x150) hard. 50% TH 333 20% max. pigmented pastes TP 2009/XX	IT UNI 9796 (DM6/3/92)	1	MDF
TC-NERO (black)	PU	450	sealer TU 22/13 (2x150) hard. 50% TH 333 topcoat TZ 22** (1x150) hard. 50% TH 333 20% max. pigmented pastes TP 2009/XX	IT UNI 9796 (DM6/3/92)	1	MDF
TC-ROSSO (red)	PU	450	sealer TU 22/13 (2x150) hard. 50% TH 333 topcoat TZ 22** (1x150) hard. 50% TH 333 20% max. pigmented pastes TP 2009/XX	IT UNI 9796 (DM6/3/92)	1	MDF
TC-VERDE (green)	PU	450	sealer TU 22/13 (2x150) hard. 50% TH 333 topcoat TZ 22** (1x150) hard. 50% TH 333 20% max paste TP 2009/XX	IT UNI 9796 (DM6/3/92)	1	MDF
without a name	water	400	multi-coat AF 22/13 (2x200) + 3% pigmented pastes XA 2006	IT UNI 9796 (DM6/3/92)	1	MDF
TE-R	water	400	multi-coat AF 1105 (2x200) hard. 10% AH 111 + 5% pigmented paste XA 2006/26	IT UNI 9796 (DM6/3/92)	1	MDF
TE-G	water	400	multi-coat AF 1105 (2x200) hard. 10% AH 111 + 5% pigmented paste XA 2006/17	IT UNI 9796 (DM6/3/92)	1	MDF
TE-B	water	400	multi-coat AF 1105 (2x200) hard. 10% AH 111 + 5% pigmented paste XA 2006/BB	IT UNI 9796 (DM6/3/92)	1	MDF
TE-N	water	400	multi-coat AF 1105 (2x200) hard. 10% AH 111 + 5% pigmented paste XA 2006/72	IT UNI 9796 (DM6/3/92)	1	MDF




BS476 part 7 (UK)

Coating system name	Chemistry	g/mq	Clear	Standard	Class	Substrate
TA	PU	450	sealer TU 22 (2x150) hard. 50% TH 222 topcoat TZ 22** (1x150) hard. 50% TH 222	UK BS476 part.7	1	Birch, oak
TA	PU	450	sealer TU 22 (2x150) hard. 50% TH 222 topcoat TZ 22** (1x150) hard. 50% TH 222	UK BS476 part.7	1	MDF
TO (TOP GLOSS)	PE	720	primer TU 565/00 (1x100) hard. 100% TH 765/00 + 50% DT 1150, sealer PU 4101 + 50% Px 4102 + 2% PH 777 + 2% PH 999 (2X250), topcoat TL 4100 (1x120) hard. 100% TH 735 + 5% DT 441	UK BS476 part.7	1	MDF
			White			
TB	PU	450	sealer TU 22/13 (2x150) hard. 50% TH 333 topcoat TZ 22**/13 (1x150) hard. 50% TH 333	UK BS476 part.7	1	MDF
			Pigmented			
TC	PU	450	sealer TU 22/13 (2x150) hard. 50% TH 333 topcoat TZ 22** (1x150) hard. 50% TH 333 20% max. pigmented pastes TP 2009/XX	UK BS476 part.7	1	MDF

M1 (France)

Coating system name	Chemistry	g/mq	Clear	Standard	Class	Substrate
TE	water	400	multi-coat AF 1105 (2x200) hard. 10% AH 111	M1	1	plywood M1 thickness 15 mm
without a name	water	240	multi-coat AF 56**/00 (2x120) +5% JJ 500	M1	1	plywood M1 thickness 15 mm
without a name	PU	200	sealer TU 280/00 (1x100) hard. 50% TH 773/00 topcoat TZ 3325/00 (1x100) hard. 50% TH 773/00	M1	1	plywood M1 thickness 15 mm
without a name	PU	240	multi-coat TU 74**/00 (2x120) hard. 40% TH 759/00 + 5% JJ 500	M1	1	plywood M1 thickness 15 mm

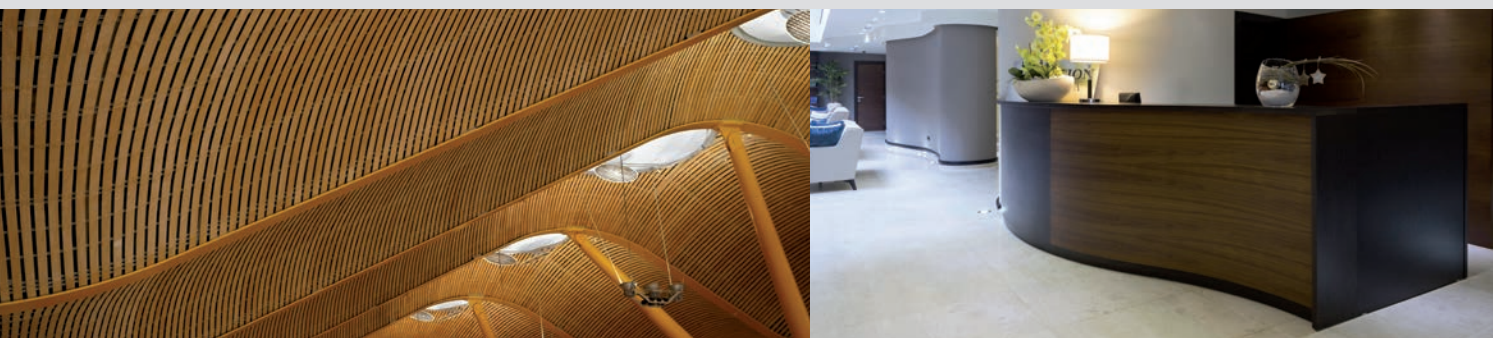

European Standard - Wall position

Coating system name	Chemistry	g/mq	Clear	Standard	Class	Substrate
TA	PU	450	sealer TU 22 (2x150) hard. 50% TH 222 topcoat TZ 22** (1x150) hard. 50% TH 222	EN13501	Bs2d0	on MDF class Bs2d0
			White			
TB	PU	450	sealer TU 22/13 (2x150) hard. 50% TH 333 topcoat TZ 22**/13 (1x150) hard. 50% TH 333	EN13501	Bs2d0	on MDF class Bs2d0
			Pigmented			
TC	PU	450	sealer TU 22/13 (2x150) hard. 50% TH 333 topcoat TZ 22** (1x150) hard. 50% TH 333 20% max. pigmented pastes TP 2009/XX	EN13501	Bs2d0	on MDF class Bs2d0

European Standard - Flooring position

Coating system name	Chemistry	g/mq	Clear	Standard	Class	Substrate
PAV (ciclo A)	PU	300	sealer TU 22 (1x150) hard. 50% TH 222 topcoat TZL 3020 (1x150) hard. 20% TH 790	test certificate EU EN ISO 9239	BFLs1	Oak
PAV (ciclo C)	PU	300	sealer AF 1105 (1x150) hard. 10% AH 111 topcoat TZL 3020 (1x150) hard. 20% TH 790	test certificate EU EN ISO 9239	BFLs1	Oak

MED regulations (nautical)

Coating system name	Chemistry	g/mq	Clear	Standard	Class	Substrate
TE	water	200	multi-coat AF 1105 (1x200) hard. 10% AH 111	MED 96/98/CE (IMO FTP code annex1 part.2 and 5 A653(16)) module B and D	Pass	On surface materials and floor coverings with low flame-spread characteristics
			White			
TD	water	210	multi-coat AF 22/13 (1x210)	MED 96/98/CE (IMO FTP code annex1 part.2 and 5 A653(16)) module B and D	Pass	On surface materials and floor coverings with low flame-spread characteristics
			Pigmented			
TE-R	water	150	multi-coat AF 1105 (1x150) hard. 10% AH 111 + 5% pigmented paste XA 2006/26	MED 96/98/CE (IMO FTP code annex1 part.2 and 5 A653(16)) module B and D	Pass	On surface materials and floor coverings with low flame-spread characteristics



Sayerlack is a brand of The Sherwin-Williams Company

Sherwin-Williams Italy S.r.l. - Export Department

Via del Fiffo 12 - 40065 Pianoro (BO) - Italy
tel. +39 051 770511 - fax +39 051 770528
export@sayerlack.it - www.sayerlack.com

Sherwin-Williams UK Coatings Ltd.

A1 Business Park
Knottingley - West Yorkshire - WF11 OBU - England
tel. +44 (0) 1977 673363 - fax +44 (0) 1977 673521
ukinfo@sherwin.com - www.sayerlack.co.uk

Sherwin-Williams Ireland Ltd.

53 Robinhood Industrial Estate
Dublin 22 - Ireland
tel. 353 1460 1445 - fax +353 1460 1449
irlinfo@sherwin.com - www.sayerlack.co.uk

Technical Service

tel. +39 051 770770 - fax +39 051 770521
customerservice@sayerlack.com